

## ASIA PACIFIC SHENGRUI LIMITED

Phone +00852 56261528

info@apacfan.com

www.apacfan.com

## Nominal data

|                             |                    |      |      |
|-----------------------------|--------------------|------|------|
| Type                        | A2S130-AA03-01     |      |      |
| Motor                       | M2S052-CA          |      |      |
| Phase                       |                    | 1~   | 1~   |
| Nominal voltage             | VAC                | 230  | 230  |
| Frequency                   | Hz                 | 50   | 60   |
| Method of obtaining data    |                    | fa   | fa   |
| Valid for approval/standard |                    | CE   | CE   |
| Speed (rpm)                 | min <sup>-1</sup>  | 2800 | 3250 |
| Power consumption           | W                  | 45   | 39   |
| Current draw                | A                  | 0.31 | 0.25 |
| Max. back pressure          | Pa                 | 80   | 120  |
| Max. back pressure          | inH <sub>2</sub> O | 0.32 | 0.48 |
| Min. ambient temperature    | °C                 | -25  | -25  |
| Max. ambient temperature    | °C                 | 50   | 70   |
| Starting current            | A                  | 0.45 | 0.40 |


ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change



## Technical description


|                                                                            |                                                       |
|----------------------------------------------------------------------------|-------------------------------------------------------|
| Weight                                                                     | 0.9 kg                                                |
| Fan size                                                                   | 130 mm                                                |
| Rotor surface                                                              | Rotor open, painted black                             |
| Blade material                                                             | Sheet steel, painted black                            |
| Number of blades                                                           | 7                                                     |
| Airflow direction                                                          | "V"                                                   |
| Direction of rotation                                                      | Counterclockwise, viewed toward rotor                 |
| Degree of protection                                                       | IP20                                                  |
| Insulation class                                                           | "B"                                                   |
| Max. permitted ambient temp. for motor (transport/storage)                 | + 80 °C                                               |
| Min. permitted ambient temp. for motor (transport/storage)                 | - 40 °C                                               |
| Installation position                                                      | Any                                                   |
| Condensation drainage holes                                                | None, open rotor                                      |
| Mode                                                                       | S1                                                    |
| Motor bearing                                                              | Ball bearing                                          |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | < 0.75 mA                                             |
| Motor protection                                                           | Thermal overload protector (TOP) internally connected |
| With cable                                                                 | Variable                                              |
| Protection class                                                           | I (with customer connection of protective earth)      |
| Conformity with standards                                                  | EN 60335-1; CE                                        |
| Approval                                                                   | UL 507; CCC; EAC; VDE; CSA C22.2 No. 113              |

## Product drawing

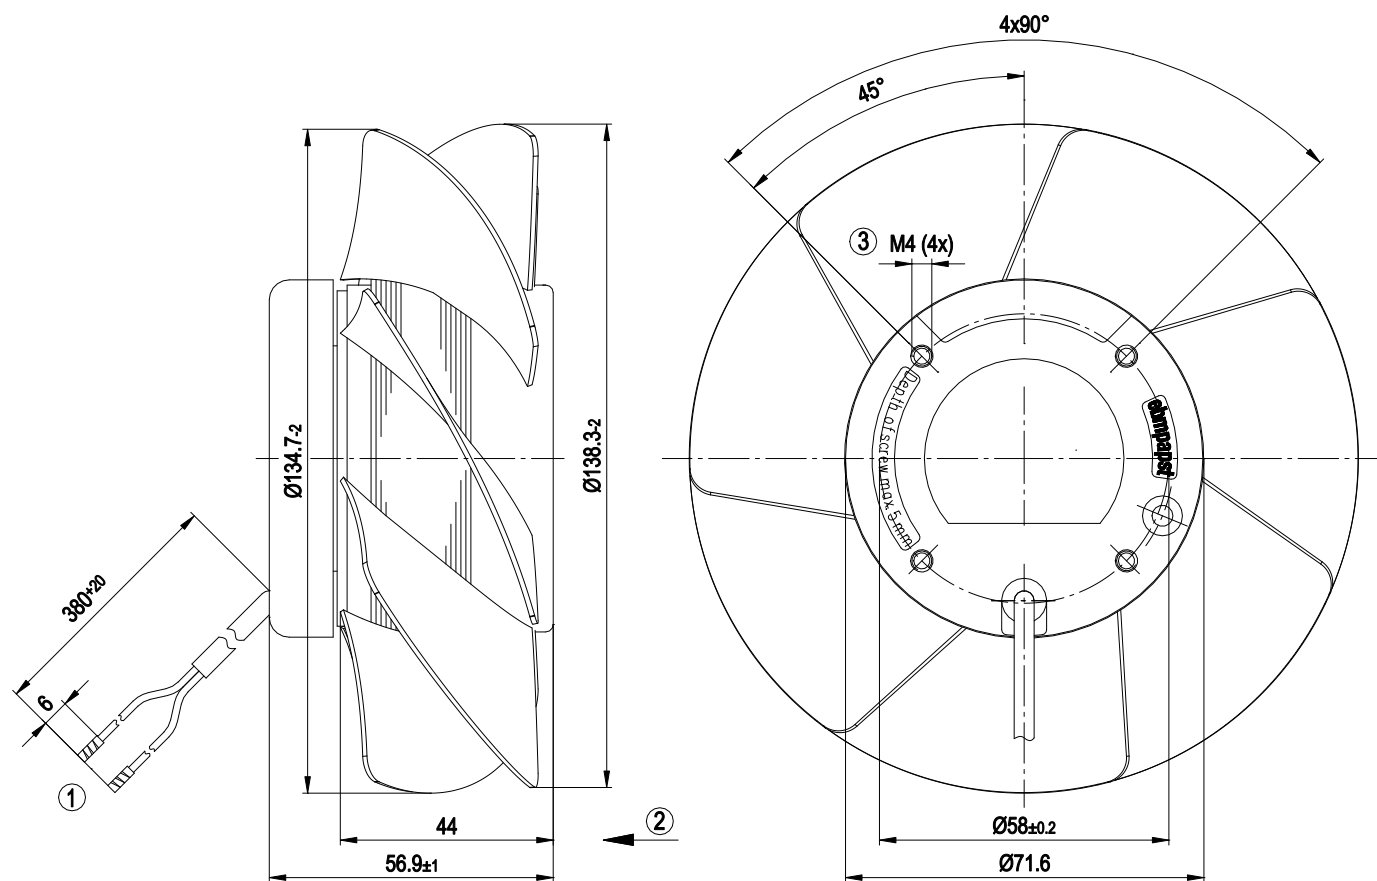

|   |                                 |
|---|---------------------------------|
| 1 | Cable AWG20, 2x crimped splices |
| 2 | Direction of air flow "V"       |
| 3 | Max. clearance for screw 5 mm   |

## Connection diagram




|     |                              |
|-----|------------------------------|
| L   | = black                      |
| N   | = black                      |
| TOP | = thermal overload protector |

# AC axial fan

single-intake

## Curves: Air performance 50 Hz

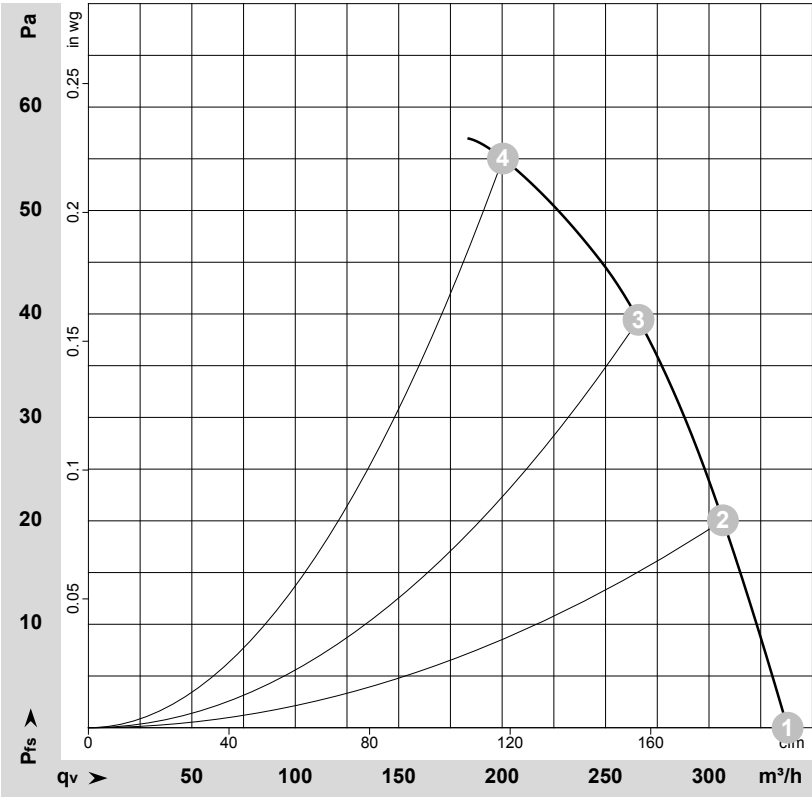

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-58475-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|   | U   | f  | n                 | P <sub>e</sub> | I    | q <sub>v</sub>    | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub>    |
|---|-----|----|-------------------|----------------|------|-------------------|-----------------|----------------|--------------------|
|   | V   | Hz | min <sup>-1</sup> | W              | A    | m <sup>3</sup> /h | Pa              | CFM            | inH <sub>2</sub> O |
| 1 | 230 | 50 | 2800              | 45             | 0.31 | 340               | 0               | 200            | 0.00               |
| 2 | 230 | 50 | 2795              | 45             | 0.31 | 305               | 20              | 180            | 0.08               |
| 3 | 230 | 50 | 2780              | 46             | 0.31 | 265               | 40              | 155            | 0.16               |
| 4 | 230 | 50 | 2780              | 46             | 0.31 | 200               | 55              | 120            | 0.22               |


U = Power supply · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase



# AC axial fan

single-intake

## Curves: Air performance 60 Hz

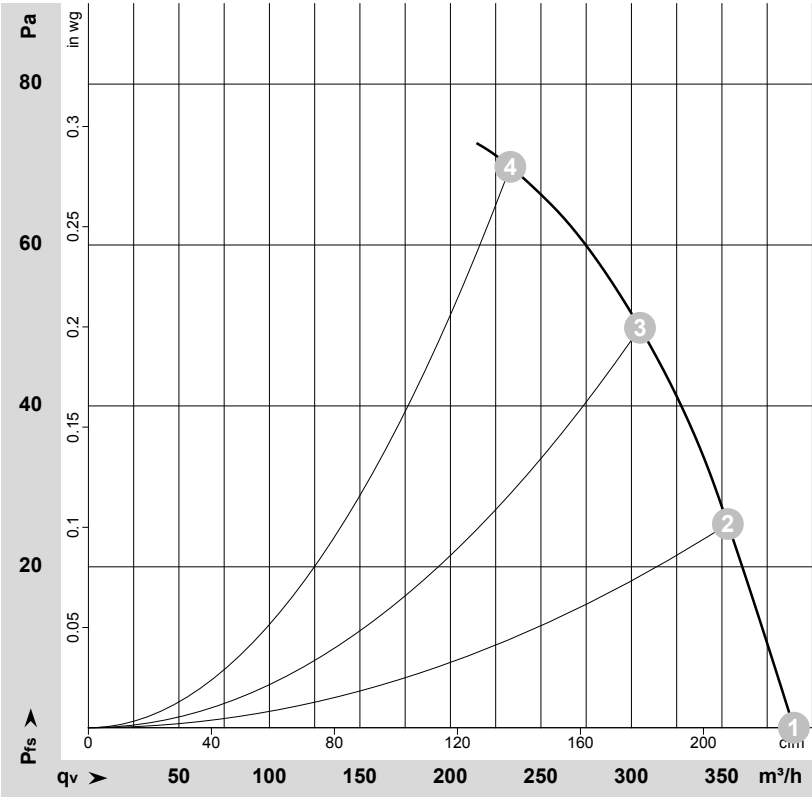

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-58476-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|   | U   | f  | n                 | P <sub>e</sub> | I    | q <sub>v</sub>    | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub>    |
|---|-----|----|-------------------|----------------|------|-------------------|-----------------|----------------|--------------------|
|   | V   | Hz | min <sup>-1</sup> | W              | A    | m <sup>3</sup> /h | Pa              | CFM            | inH <sub>2</sub> O |
| 1 | 230 | 60 | 3250              | 39             | 0.25 | 390               | 0               | 230            | 0.00               |
| 2 | 230 | 60 | 3200              | 42             | 0.25 | 355               | 25              | 210            | 0.10               |
| 3 | 230 | 60 | 3165              | 43             | 0.26 | 305               | 50              | 180            | 0.20               |
| 4 | 230 | 60 | 3145              | 44             | 0.26 | 235               | 70              | 135            | 0.28               |

U = Power supply · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

