

G2E120-AR77-90

# AC centrifugal fan

forward-curved, single-intake  
with housing (flange)

ASIA PACIFIC SHENGRUI LIMITED

Phone +00852 56261528

info@apacfan.com

www.apacfan.com

## Nominal data

|                             |                   |         |         |
|-----------------------------|-------------------|---------|---------|
| Type                        | G2E120-AR77-90    |         |         |
| Motor                       | M2E068-BF         |         |         |
| Phase                       |                   | 1~      | 1~      |
| Nominal voltage             | VAC               | 230     | 230     |
| Frequency                   | Hz                | 50      | 60      |
| Method of obtaining data    |                   | fa      | fa      |
| Valid for approval/standard |                   | CE      | CE      |
| Speed (rpm)                 | min <sup>-1</sup> | 2350    | 2450    |
| Power consumption           | W                 | 80      | 100     |
| Current draw                | A                 | 0.35    | 0.44    |
| Capacitor                   | μF                | 2       | 2       |
| Capacitor voltage           | VDB               | 450     | 450     |
| Capacitor standard          |                   | S0 (CE) | S0 (CE) |
| Min. back pressure          | Pa                | 0       | 0       |
| Min. back pressure          | in. wg            | 0       | 0       |
| Min. ambient temperature    | °C                | -25     | -25     |
| Max. ambient temperature    | °C                | 45      | 55      |
| Starting current            | A                 | 0.47    | 0.47    |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change



# AC centrifugal fan

forward-curved, single-intake

with housing (flange)

## Technical description


|                                                                            |                                                                    |
|----------------------------------------------------------------------------|--------------------------------------------------------------------|
| Weight                                                                     | 2.2 kg                                                             |
| Size                                                                       | 120 mm                                                             |
| Motor size                                                                 | 68                                                                 |
| Rotor surface                                                              | Painted black                                                      |
| Terminal box material                                                      | PP plastic                                                         |
| Impeller material                                                          | Sheet steel, painted black                                         |
| Housing material                                                           | Die-cast aluminum, painted black                                   |
| Direction of rotation                                                      | Clockwise, viewed toward rotor                                     |
| Degree of protection                                                       | IP44; installation- and position-dependent                         |
| Insulation class                                                           | "B"                                                                |
| Moisture (F) / Environmental (H) protection class                          | H0 - dry environment                                               |
| Max. permitted ambient temp. for motor (transport/storage)                 | + 80 °C                                                            |
| Min. permitted ambient temp. for motor (transport/storage)                 | - 40 °C                                                            |
| Installation position                                                      | Any                                                                |
| Condensation drainage holes                                                | None                                                               |
| Mode                                                                       | S1                                                                 |
| Motor bearing                                                              | Ball bearing                                                       |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | < 0.75 mA                                                          |
| Electrical hookup                                                          | Terminal box; Via terminal box, capacitor integrated and connected |
| Motor protection                                                           | Thermal overload protector (TOP) internally connected              |
| Protection class                                                           | I (with customer connection of protective earth)                   |
| Motor capacitor according to EN 60252-1 in safety protection class         | S0                                                                 |
| Conformity with standards                                                  | EN 60034-1; EN 60204-1; EN 60335-1; CE                             |
| Approval                                                                   | CCC; EAC                                                           |



# AC centrifugal fan


forward-curved, single-intake  
with housing (flange)

## Product drawing

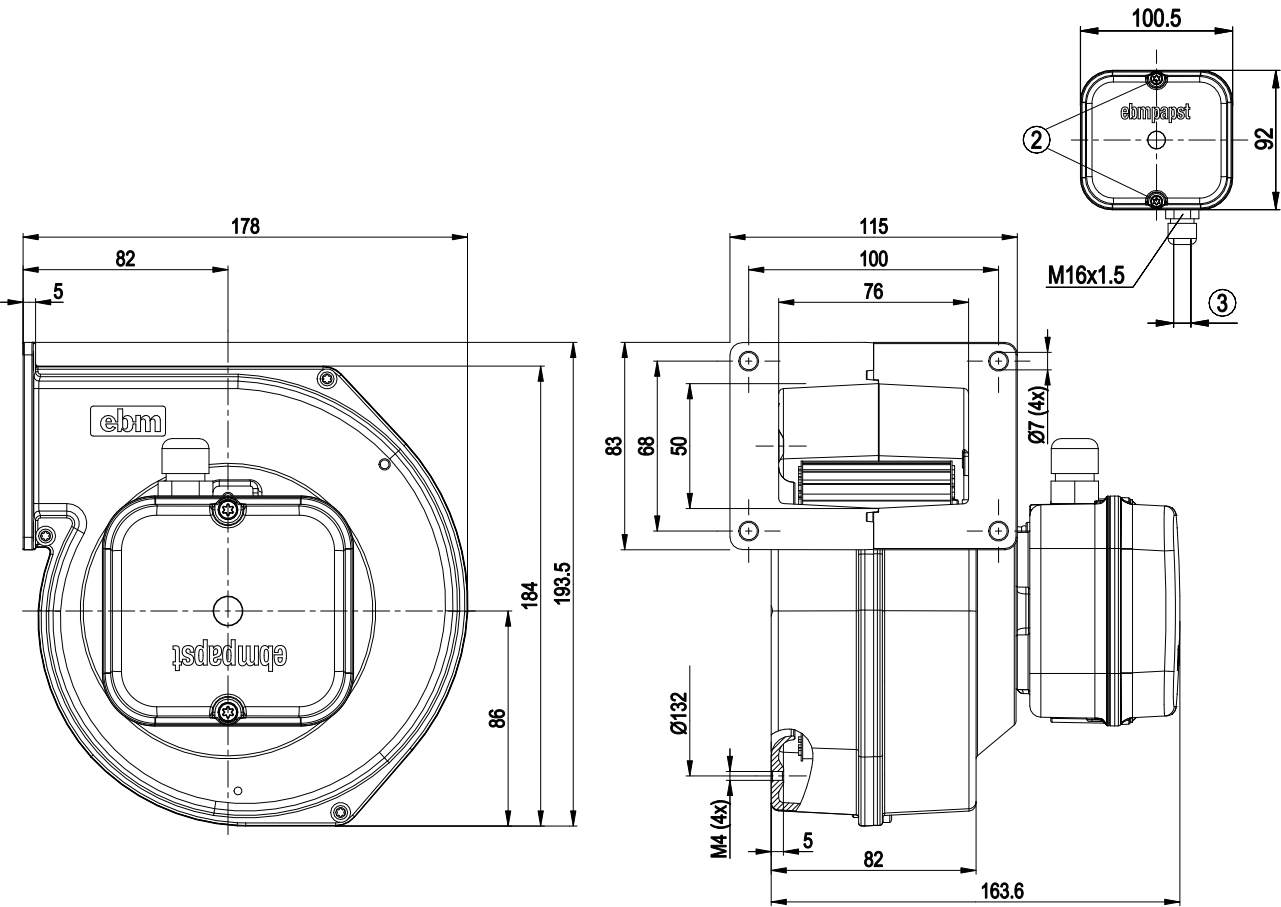

- 1 Tightening torque  $1.5 \pm 0.2$  Nm
- 2 Cable diameter: max. 7.5 mm; tightening torque  $1.3 \pm 0.2$  Nm

## Connection diagram




|    |              |   |       |   |              |
|----|--------------|---|-------|---|--------------|
| L  | = U1 = blue  | Z | brown | N | = U2 = black |
| PE | green/yellow |   |       |   |              |



# AC centrifugal fan

forward-curved, single-intake  
with housing (flange)

## Curves: Air performance 50 Hz

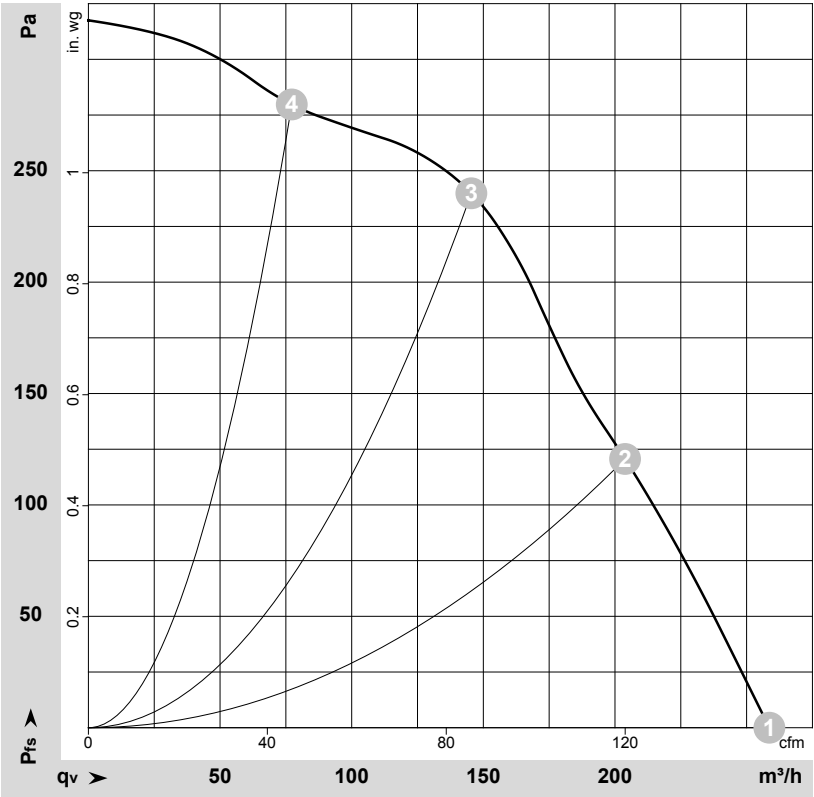

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-104578-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|   | U   | f  | n                 | P <sub>e</sub> | I    | q <sub>V</sub>    | p <sub>fs</sub> | q <sub>V</sub> | p <sub>fs</sub> |
|---|-----|----|-------------------|----------------|------|-------------------|-----------------|----------------|-----------------|
|   | V   | Hz | min <sup>-1</sup> | W              | A    | m <sup>3</sup> /h | Pa              | cfm            | in. wg          |
| 1 | 230 | 50 | 2350              | 80             | 0.35 | 260               | 0               | 150            | 0.00            |
| 2 | 230 | 50 | 2515              | 73             | 0.33 | 205               | 120             | 120            | 0.48            |
| 3 | 230 | 50 | 2655              | 68             | 0.31 | 145               | 240             | 85             | 0.96            |
| 4 | 230 | 50 | 2760              | 65             | 0.31 | 75                | 280             | 45             | 1.12            |


U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · q<sub>V</sub> = Air flow · p<sub>fs</sub> = Pressure increase



# AC centrifugal fan

forward-curved, single-intake  
with housing (flange)

## Curves: Air performance 60 Hz

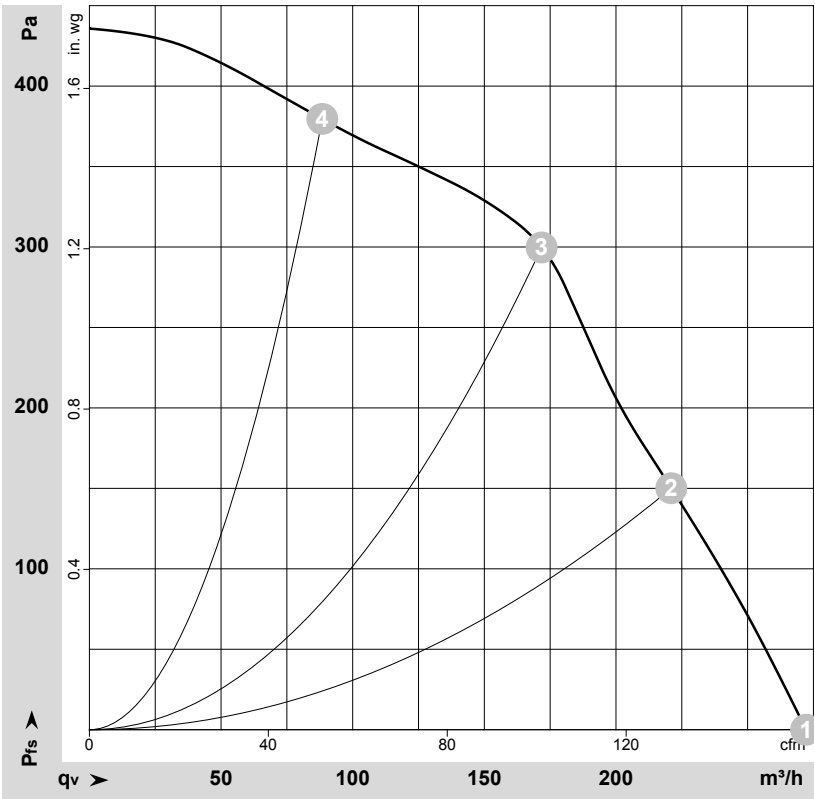

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-104581-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|   | U   | f  | n                 | P <sub>e</sub> | I    | q <sub>V</sub>    | p <sub>fs</sub> | q <sub>V</sub> | p <sub>fs</sub> |
|---|-----|----|-------------------|----------------|------|-------------------|-----------------|----------------|-----------------|
|   | V   | Hz | min <sup>-1</sup> | W              | A    | m <sup>3</sup> /h | Pa              | cfm            | in. wg          |
| 1 | 230 | 60 | 2450              | 100            | 0.44 | 270               | 0               | 160            | 0.00            |
| 2 | 230 | 60 | 2780              | 91             | 0.40 | 220               | 150             | 130            | 0.60            |
| 3 | 230 | 60 | 2960              | 85             | 0.37 | 170               | 300             | 100            | 1.20            |
| 4 | 230 | 60 | 3195              | 76             | 0.33 | 90                | 380             | 50             | 1.53            |

U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · q<sub>V</sub> = Air flow · p<sub>fs</sub> = Pressure increase

