



8000V Series

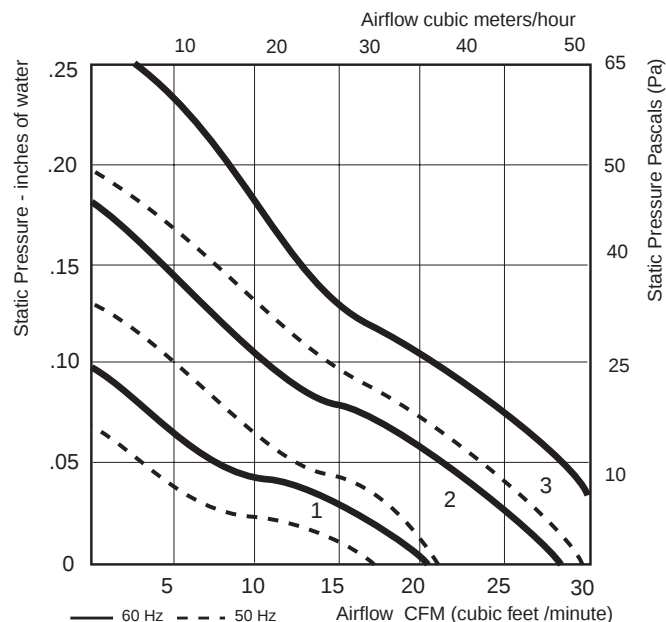

Terminals
Air Exhaust – Over struts
Mounting Bosses

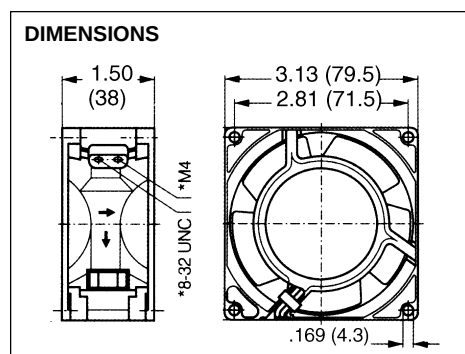

AVAILABLE WITH:

HIGH PERFORMANCE
SINTEC
SLEEVE BEARING SYSTEM

3.13" X 3.13" X 1.50" AC Fan, All Metal, Air Exhaust – Over struts

Curve	PART NUMBER	Type of Bearing	AC Volts	Hertz	Watts	CFM		Temp. Max °C	Wgt. (oz)	Features	Approvals*		
						@ 0"	dBA				UL	CSA	VDE
1	8830V	Sleeve	115	50/60	8	21	21	80	17	Terminals	✓	✓	✓
1	8880V	Sleeve	230	50/60	8	21	21	80	17	Terminals	✓	✓	✓
2	8800V	Sleeve	115	50/60	11	28	28	70	17	Terminals	✓	✓	✓
2	8850V	Sleeve	230	50/60	11	28	28	70	17	Terminals	✓	✓	✓
3	8500V	Sleeve	115	50/60	11	36	34	75	17	Terminals	✓	✓	✓
3	8550V	Sleeve	230	50/60	11	36	34	75	17	Terminals	✓	✓	✓
3	8506V	Ball	115	50/60	11	36	35	95	17	Terminals	✓	✓	✓
3	8556V	Ball	230	50/60	11	36	35	95	17	Terminals	✓	✓	✓
3	8560VW	Sleeve	115/230	50/60	11	36	34	70	17	22 AWG 12.2" Leads	✓	✓	✓

* UL yellow card E38324, CSA file 27697, VDE file 6617

CONSTRUCTION MOUNTING & CONNECTION

Mounting: Either face using four .169" (4.3mm) holes.
Weight: 17 ounces (490g)

Housing: Metal with metal impeller
Connection: Terminals, two flat pins, .110" x .02"
(2.8 x .5 mm)

ASIA PACIFIC SHENGRUI LIMITED

Phone +00852 56261528

info@apacfan.com

www.apacfan.com